

HANDY LINE H110E

TYPE	Pass-through dishwasher
LINE	HANDY LINE
BASKET	500x500
SIZE	620x770x1435/1900h



The HANDY line stands out for its wide range of models suitable for any situation. The simple electronic board control system makes it possible to set and control the rinsing and draining times and temperatures and the relevant Thermostops, crucial for ensuring excellent final results. With the control panel you can choose one of its 4 washing cycles and one automatic drain cycle (with installed drain pump), easily view on the display the tank and boiler temperature, the messages of the Self-diagnosis system and the Scheduled Maintenance warning. The smart Start button changes colour to always keep you up-to-date on the dishwasher status with the greatest ease.

The H110E hood type dishwasher is the most suitable solution for businesses that are faced with the washing of different types of dishes, proving capable of washing glasses, dishes, medium sized objects and GN 1/1 baking trays in only 620 mm wide, ensuring a maximum productivity of 60 baskets/hour (1080 dishes/hour). The hood type models are fitted with an easily removable basket support for easy cleaning and a rounded moulded tank with integral filters for perfect draining and absolute hygiene. The "PUSH TO START" cycle start system ensures less waste preventing the start of empty washes.


The electronic control allows you to manage various parameters to give you an absolute customisation level and the continuous self-diagnosis allows you to minimise machine downtime, suggesting some operations to be verified. The self-cleaning cycle at the end of the day cleans the wash tank and empties the boiler from the hot water, preventing limestone forming inside. The standard double peristaltic electric rinse-aid and detergent dispenser ensures the best result from each wash cycle with great savings thanks to the precise dosage managed by the electronic card; whereas, the moulded washing and rinsing arms ensure great reliability and durability. The Thermo-stop function checks that washing and rinsing begin only when the desired temperature is reached. The bodywork is made entirely of AISI 304 steel and has been designed with all components in the front to allow easy technical assistance. Sturdy and reliable dishwashers to best deal with every moment of your day.

CERTIFIED



ON REQUEST



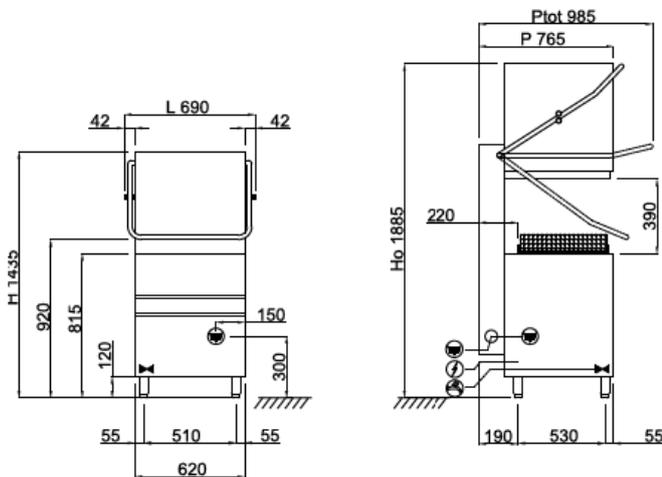

-  **400V3N+T 6,52kW**
L=1950 (5 POLES)
-  **G 3/4" M**
L=1200
-  **Ø25x30**
L=1550

DISHWASHERS FEATURES

Dimensions - (mm) L - P - H	620x770x1435/1900h
n° baskets/hour - (+55°C)	Max 60
Height glass max	390mm
Ø height plate max	415mm
Height pot max	390mm
LT bread basket	40 (H=390mm)
Trays	GN1/1
Tank heating element - Tank capacity	4,5kW - 37lt
Boiler heating element - Boiler capacity	5,4kW - 7,3lt
Washing pump	1,34kW / 1,8Hp
Total power input / Current	6,74kW / 16A
Standard input voltage	400V3N+T / 230V 50Hz
Recommended inlet water temperature	+55°C
Water hardness	7÷10 °f
Water consumption per cycle (inlet suggested pressure 2 BAR)	2,0lt
Adjustable detergent and rinse-aid dispenser	ELECTRIC

STANDARD EQUIPMENT

Basket for glasses dim.500x500x100mm	1
Basket for 18 dishes dim.500x500x100mm	2
8 division cutlery insert	1
Integral tank filter	2

ACCESSORIES

Input voltage 230V/3+T	●
Booster pump kit 0,5Hp	●
Drain pump kit 40W	●
Boiler heating element 4,5kW	●
Boiler heating element 5,4kW	●
Reverse osmosis system	-
Basket for trays with 4 compartments dim.500x500x200mm	●
Inclined basket for wine glasses dim.500x500x170mm	●
Kit 4 Stainless steel feet 50-70mm	-
Remote control with LCD display	●

CE Remote control with LCD display



● = INSTALLABLE ACCESSORY , - = NOT INSTALLABLE ACCESSORY