

## KTSR-3 TRIPLE SOLID DOOR TOP MOUNT REFRIGERATOR

All-stainless steel construction, heavy-duty refrigeration system that delivers reliable and efficient cold storage with superior quality.



## **KEY FEATURES**



### • Eco-Friendly Refrigerant

Environmentally friendly R290 hydrocarbon refrigerant has low Global Warming Potential (GDP). Meets all USA, California & Canada refrigerant & energy standards.



### Digital Control

Digital temperature controls and display with automatic defrost system.



### • High Power Reliable Refrigeration System

Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining cooler temperatures for food preservation.



### Standard LED Lighting System

Ultra bright low energy interior LED illumination system provides optimal merchandise display visibility.



### • Durable, Self-contained System

Stainless steel exterior and interior, coated evaporator coil and oversized top mount compressor














3560 NW 56th Street Fort Lauderdale, FL, United States 33309 Telephone: 786.600.4687 / Toll Free: 844.218.8477 Fax: 786.661.4100 5659 Royalmount Ave. Montreal, QC, Canada H4P 2P9 Telephone: 514.737.9701 / Toll Free: 888.275.4538 Fax: 514.342.3854 / Toll Free: 877.453.8832 sales@mvpgroupcorp.com / mvpgroupcorp.com



# KTSR-3 TRIPLE SOLID DOOR TOP MOUNT REFRIGERATOR

### **PRODUCT VIEWS**

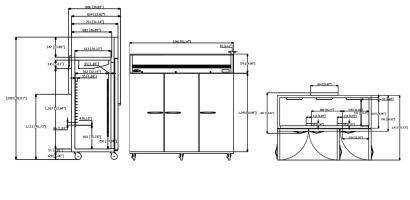

Side Front Top

### **ADDITIONAL FEATURES**



Door Lock & Key set for security



Heavy-duty 5" castors (2 with brakes)



Self-closing doors with stay open feature



Open door alert beeps when door has been open for 3 minutes



Foamed-in-place high-density CFC-free polyurethane insulation



Tight-sealing magnetic vinyl gaskets

### **TECHNICAL SPECIFICATIONS**

| Exterior Dimensions |                | Interi | Interior Dimensions |  |
|---------------------|----------------|--------|---------------------|--|
| W:                  | 81" (2060 mm)  | W:     | 76.7" (1948 mm)     |  |
| D:                  | 34.9" (886 mm) | D:     | 24.5" (574 mm)      |  |
| H:                  | 82" (2083 mm)  | H:     | 53.8" (1366 mm)     |  |

### **Interior Capacity**

67.9 Cu Ft 1923 L

| Doors             | Material        | Shelves         |  |
|-------------------|-----------------|-----------------|--|
| 3                 | Stainless Steel | 9               |  |
| Exterior Material |                 | Stainless Steel |  |
| Interior Material |                 | Stainless Steel |  |

### REFRIGERATION PERFORMANCE

| Refrigerant                |                            |  |
|----------------------------|----------------------------|--|
| R290                       |                            |  |
| Compressor Power           |                            |  |
| 1/2 HP                     |                            |  |
| Thermostat default setting | 33°F (0.5°C) to 30°F (4°C) |  |

### **ELECTRICAL**

| Power Supply | Amps | Lighting     |
|--------------|------|--------------|
| 115V/60Hz    | 6.3A | LED Interior |
| Plug Type    |      |              |

NEMA 5-15P

### **LOGISTICS**

| Shipping Weight |
|-----------------|
| 571 lb (259 kg) |