

KUCR-36-2 DOUBLE DOOR UNDERCOUNTER REFRIGERATOR

All-stainless steel construction, heavy-duty refrigeration system that delivers reliable and efficient cold storage with superior quality.

KEY FEATURES



• Eco-Friendly Refrigerant Environmentally friendly R290 hydrocarbon refrigerant has low Global Warming Potential (GDP). Meets all USA, California & Canada refrigerant & energy standards.




• Digital Control Digital temperature controls and display with automatic defrost system.



• High Power Reliable Refrigeration System Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining cooler temperatures for food preservation.



• Durable, Self-contained System Stainless steel exterior and interior, coated evaporator coil and oversized bottom mount compressor

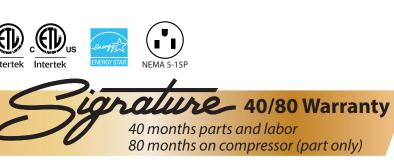




3560 NW 56th Street Fort Lauderdale, FL, United States 33309 Telephone: 786.600.4687 / Toll Free: 844.218.8477 Fax: 786.661.4100 5659 Royalmount Ave. Montreal, QC, Canada H4P 2P9 Telephone: 514.737.9701 / Toll Free: 888.275.4538 Fax: 514.342.3854 / Toll Free: 877.453.8832 sales@mvpgroupcorp.com / mvpgroupcorp.com



KUCR-36-2 DOUBLE DOOR UNDERCOUNTER REFRIGERATOR

PRODUCT VIEWS

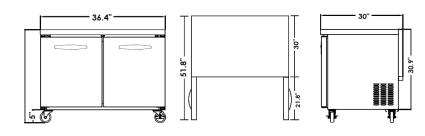

Тор

Front

Side

ADDITIONAL FEATURES



Heavy-duty 5" castors (2 with brakes)

Self-closing doors



Foamed-in-place high-density CFC-free polyurethane insulation



Tight-sealing magnetic vinyl gaskets

TECHNICAL SPECIFICATION

Exterior Dimensions		Interior Dimensions				
W:	36.4" (922 mm)		W:	33.4″ (848 mm)		
D: 30" (762 mm)		D:	27.2″ (691 mm)			
H:	35.9" (912 mm)		H:	28.9″ (734 mm)		
Interior Capacity						
9.5 Cu Ft 269 L						
Doors Material		Material	Shelves			
2		Stainless Steel	4			
Exterior Material		Stainless Steel				
Interior Material		Stainless Steel				

REFRIGERATION PERFORMANCE

Refrigerant					
R290					
Compressor Power					
1/4 HP					
Thermostat default setting	33°F (0.5°C) to 40°F (4°C)				

ELECTRICAL						
Power Supply	Amps					
115V/60Hz	3.8A					
Plug Type						

NEMA 5-15P

LOGISTICS							
Unit Weight	Shipping Dimensions						
172 lb (78 kg)	W:	37.8″ (960 mm)					
Shipping Weight	D:	34.1″ (866 mm)					
189 lb (86 kg)	H:	36.6" (930 mm)					