

KUCR-48-2 DOUBLE DOOR UNDERCOUNTER REFRIGERATOR

All-stainless steel construction, heavy-duty refrigeration system that delivers reliable and efficient cold storage with superior quality.

KEY FEATURES



• Eco-Friendly Refrigerant Environmentally friendly R290 hydrocarbon refrigerant has low Global Warming Potential (GDP). Meets all USA, California & Canada refrigerant & energy standards.



• Digital Control Digital temperature controls and display with automatic defrost system.



• High Power Reliable Refrigeration System Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining cooler temperatures for food preservation.



• Durable, Self-contained System Stainless steel exterior and interior, coated evaporator coil and oversized bottom mount compressor






3560 NW 56th Street Fort Lauderdale, FL, United States 33309 Telephone: 786.600.4687 / Toll Free: 844.218.8477 Fax: 786.661.4100 5659 Royalmount Ave. Montreal, QC, Canada H4P 2P9 Telephone: 514.737.9701 / Toll Free: 888.275.4538 Fax: 514.342.3854 / Toll Free: 877.453.8832 sales@mvpgroupcorp.com / mvpgroupcorp.com



KUCR-48-2 DOUBLE DOOR UNDERCOUNTER REFRIGERATOR

PRODUCT VIEWS

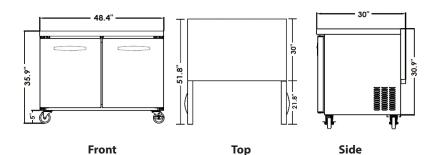

Exterior Dimensions Interior Dimensions W: 48.4" (1227 mm) W: 43.3" (1100 mm) D: 30" (762 mm) D: 20.1" (511 mm)

TECHNICAL SPECIFICATIONS

| H: | 35.9″ (912 mm) | | H: | 26.5″ (673 mm) | | | |
|---------------------|----------------|-----------------|-----------------|----------------|--|--|--|
| Interior Capacity | | | | | | | |
| 13.1 Cu Ft 371 L | | | | | | | |
| Doors | | Material | Shelves | | | | |
| 2 | | Stainless Steel | 4 | | | | |
| Exterio | r Material | | Stainless Steel | | | | |
| Interio | r Material | | Stainless Steel | | | | |

ADDITIONAL FEATURES



Heavy-duty 5" castors (2 with brakes)

 \mathbf{O}

Foamed-in-place high-density CFC-free polyurethane insulation

Self-closing doors

Tight-sealing magnetic vinyl gaskets

REFRIGERATION PERFORMANCE

| Refrigerant | | | | | |
|----------------------------|----------------------------|--|--|--|--|
| R290 | | | | | |
| Compressor Power | | | | | |
| 1/4 HP | | | | | |
| Thermostat default setting | 33°F (0.5°C) to 40°F (4°C) | | | | |

ELECTRICAL Power Supply

| Power Supply | Amps | |
|--------------|------|--|
| 115V/60Hz | 3.9A | |
| Plug Type | | |

NEMA 5-15P

| LOGISTICS | | | | | | | |
|-----------------|---------------------|-----------------|--|--|--|--|--|
| Unit Weight | Shipping Dimensions | | | | | | |
| 194 lb (88 kg) | W: | 49.7" (1262 mm) | | | | | |
| Shipping Weight | D: | 34.1″ (866 mm) | | | | | |
| 247 lb (112 kg) | H: | 36.6" (930 mm) | | | | | |