

ESM28HCTD-HL

Cold Space Merchandiser[™]
With Health Lock Timer

Project Name: _____

Item #: _____ Quantity: _____



Integrated Health Lock



Width	Depth*	Height**	Shelves	ColdSpace™ Ship Weight	Ship Cub	Cooling Capacity	Electrical
30 1/2" 775 mm	31" 788 mm	78" 1982 mm	6	28 362lbs 164 kg	49 cu. ft 1.39 m ³	1/3 HP	115V/10 Amp/60 Hz - Single Phase NEMA5-15P,Dedicated Circuit

** Add 1/2" (39mm) for Handle. ***Add 3/8" (10mm) for Threaded-In Levelers. Millimeters rounded up. Shipped less Graphics. Custom Graphics Optional.

Flat Shelf 20oz/600ml		Gravity GlideSet™ 20 oz /600ml		Trailerload Quantity(53')
Packout	Facings	Packout	Facings	
378	9	336	8	57

Premium Features

- Cassette® Refrigeration
- Finless Free&Clear™ Condenser Coil
- LED Lighting System
- Automatic Stainless Steel Condensate Control System
- Front Breathing Refrigeration
- Priority Air-Flow
- HABCO Insulated Glass

ESM28HCTD-HL: Optimized merchandising experience with Health Timer Lockout function to prevent access to spoiled food

Intelligent Health Lock Timer:

- Intelli-Lock System – designed to automatically activate if temp within storage compartment rises above NAMA standard of 41°F (5°C) for 30 minutes.
- Integrated battery backup allows for continuous monitoring and locking during power outage.
- Restocking Mode – Extends the health lock timer by 30 minutes to avoid nuisance lock outs following restocking mode. Simply press the Up and Down arrows on the digital controller. After one hour the controller and lock will return to standard operational settings.
- Dual Temperature Probes – Glycol bottle probe ensures most accurate representation of core product temperature and maintains a tight temperature range while standard air temperature probe monitors ambient cabinet temperature, meeting health code requirements



Refrigeration:


- Self-contained Cassette® forced-air refrigeration employs R290 hydrocarbon Natural Refrigerant within a sealed capillary tube system.
- Cassette® refrigeration is bottom-mounted and removable from the front for ease of maintenance. Refrigeration may be exchanged or upgraded without mechanic. D 33°F to 38°F (0.5°C to 3.3°C).
- Priority, directed air flow provides optimum cooling and energy efficiency within cabinet and exclusively at front of unit for optimized heat exchange ventilation.
- Finless, **Free&Clear™** Condenser Coil maximizes air-flow over the compressor, reduces energy consumption and is non-clogging.
- Automatic, stainless steel condensate control system.

Cabinet:

- Exterior –durable textured black.
- Interior –NSF approved white aluminum liner with stainless steel floor.
- Space Saving Design – air ventilation exclusively from the front of unit.
- Insulation – cabinet is foamed-in-place with eco-conscious, polyurethane insulation

Doors:

- Self-Closing Swing Door features hold-open position and spring-back protection
- Reversible on location.
- Magnetic gaskets are single piece bead-mount construction easily removable for cleaning
- Heat Reflecting full door HABCO Insulated Safety Glass with black extruded frame
- Integrated, injection molded pocket handle(s).

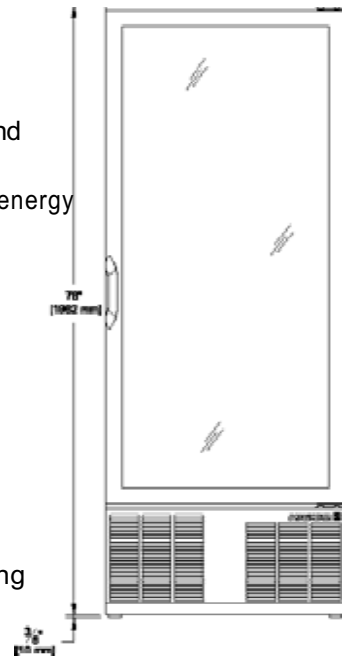

Lighting:

- Energy Efficient Full LED Array Lighting System for crisp illuminated display of products

Storage:

- Six (6) white coated shelves 26 1/4"W x 22"D (667mm x 559mm), are NSF approved.
- Heavy duty aluminum shelving pilasters will not peel or chip.
- Adjustable of 1/2" (13mm) increments
- NSF-7 compliant for storage or display of pre-packaged aseptic product.

Electricity:

- Factory power cord installed for connection to a sole-use NEMA 15-5R
- (115V/60Hz/1-Phase, 15 Amp circuit.

